



QUARRY TILE

QUARRY FLOOR

FLOOR



AMERICAN OLEAN®
PROVEN IN TILE™

AMERICANOLEAN.COM

QUARRY TILE

Quarry Tile possesses warm, natural color throughout the tile, which makes it perfect throughout the home, from floors and walls to outdoor patio and pool areas. You can choose from inviting solid colors, or "flash" surfaces with slightly-striated colors and a square edge for a little added visual texture. All with a slip-resistant, unglazed surface.

Cover and above photos feature Quarry Tile Fawn Gray and Canyon Red 6 x 6 and 3-7/8 x 8 on the floor.

QUARRY TILE

QUARRY FLOOR


FLOOR TILE




FAWN GRAY Q06 * (2)




CANYON RED Q01 * (1)



GRAY FLASH Q16 (2)



EMBER FLASH Q02 (2)

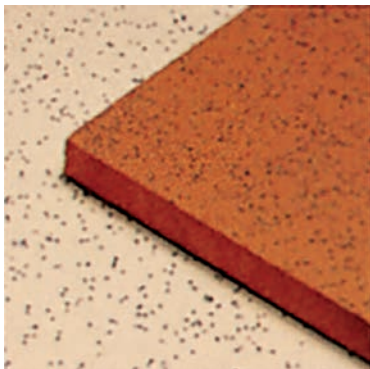

ABRASIVE GRAIN

* SPECIAL SURFACES:



Abrasive grain particles added to Quarry Tile give improved slip resistance for many types of footwear, depending on maintenance conditions. 6 x 6 size available in all Quarry colors; 3-7/8 x 8 size available in Q01 and Q02 colors only.

(1) & (2) notations indicate price group, (1) being the least expensive.









QUARRY TILE

QUARRY FLOOR

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	6 x 6 Floor Tile	6" x 6" (15.20 cm x 15.20 cm)	1/2"	11.00	44
	3-7/8 x 8 Floor Tile	3-7/8" x 8" (9.80 cm x 20.30 cm)	1/2"	10.76	50

TRIM

			NUMBER	PIECES/ CARTON
	Floor Bullnose ◆	6 x 6 x 1/2	Q-1665	44
	Floor Bullnose Corner ◆	6 x 6 x 1/2	QCR-L-1665	44
	Floor Bullnose (8" side) ◆▼	3-7/8 x 8 x 1/2	Q-1485	50
	Floor Bullnose Corner ◆▼	3-7/8 x 8 x 1/2	QCR-L-1485	20
	Cove Base ★	5 x 6 x 1/2	Q-3565	44
	Cove Base Long Corner ★◆	5 x 6 x 1/2	QCR-L3565	20
	Cove Base Outcorner ★	5 x 1 x 1/2	QC-3565	20
	Cove Base Incorner ★	5 x 1 x 1/2	QB-3565	25

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

- ◆ Also available in abrasive grain
- ★ Not available in Flash colors
- ▼ Available in colors Q01 and Q02 only
- ◆ Available by special order only (except Q01)


INSTALLATION & PRICING

RECOMMENDED GROUT JOINT:

Floor: 1/4" – 3/8"

RELATIVE PRICING: Low to High

SHADE VARIATION



PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT
Water Absorption	C373	≤ 3.0%
Breaking Strength	C648	> 350 lbs.
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: americanolean.com/information/TestResults.

USAGE

FLOORS	WALLS	COUNTERTOPS
F	W	C

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	●*
Ramps & Inclines	≥ 0.65	●*
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

- Suitable for industrial installations requiring high compressive strength.
- Subject to Oils: Absorbs oils, grease and other liquids to keep floors slip-resistant, yet does not contaminate the surface. Proper cleaning methods easily remove any contaminants that do get absorbed into the tile.
- * Abrasive surface only

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

We do not recommend light colored quarry tile in commercial kitchens unless properly sealed or a grout release is used. Periodic resealing of the tile may be necessary.

Special care should be taken when grouting; a grout release is recommended to prevent finely powdered pigments from lodging in the pores of the tile surface.

It is necessary to follow the proper procedures and recommendations from the grout and maintenance products' manufacturers.



PRE-CONSUMER
RECYCLED MATERIALS



MADE IN THE U.S.A.

All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.



Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE

©2017 AMERICAN OLEAN (12/17)



AMERICAN OLEAN®
PROVEN IN TILE™